

MEMORANDUM

DATE: November 6, 2025

TO: Kara Anderson, Sabey Data Centers

FROM: Shashad Gujaran, P.E., PTOE, RSP₁, American Structurepoint Inc.

Srihitha Puritipati, American Structurepoint Inc.

RE: Decatur Technology Park Data Center - Trip Generation Comparison

CC: Ross Nixon, P.E., American Structurepoint Inc.

Introduction

A traffic impact study (TIS) was prepared by American Structurepoint, Inc. in January 2020 for the proposed industrial development along SR 67 in Indianapolis, Indiana. The TIS was prepared in accordance with the site plan dated November 19, 2019, that indicated approximately 1.61 million square feet of general industrial, high-cube warehouse and short-term storage type developments spread across seven (7) buildings. Subsequently, an updated site plan dated November 24, 2020, was approved which included six (6) buildings of general industrial, high-cube and short-term warehouse type developments, and a retail/village type development. More recently, the site plan dated November 4, 2025, was updated again and the proposed developments in these parcels are now anticipated to include 2 data centers along with an electrical substation. This memorandum documents a comparison between the base trips generated for the approved site plan dated November 24, 2020, and the base trips generated for the current site plan, dated November 4, 2025. The purpose of this memo is to confirm that the previous recommendations identified in the previously completed Traffic Impact Study remain appropriate and valid for the current site plan.

Trip Generation Comparison

The Institute of Transportation Engineers (ITE) *Trip Generation Manual*, 12th Edition was used to estimate the peak hour trips for the previously approved and the current site plan. The developer also provided an estimated number of employees that will be employed at the data centers along with an estimated number of daily vendor deliveries, and daily customer trips. The previously approved site plan along with the trip generation estimates are included in **Attachment A**. The new site plan is included in **Attachment B**.



Trip generation calculations for the new site plan were done using both the 12th Edition of the ITE Trip Generation Manual and the data provided by the data center operator. The higher trip generation estimate was compared to the previously approved site plan's trip generation estimate to determine if the improvements identified in the TIS would still work for the current site plan. The trip generation estimates derived based on inputs provided by the data center operator were found to be higher than the 12th Edition of *ITE Trip Generation Manual* estimates hence they were used for comparison against the previously approved site plan's trip generation estimate. The trip generation calculations are included in **Attachment C**.

Summary of the trip generation comparison for the AM and PM peak hour is provided in **Table 1**.

AM Peak **PM Peak** Description Enter Exit Total **Enter** Exit Total Total Trips per Old Approved Site Plan 433 125 558 165 389 554 (dated November 24, 2020) - OLD Total Trips per Current Site Plan 80 31 111 20 86 106 (dated November 4, 2025) - NEW Change in Number of Trips (NEW - OLD) -94 -447 -145 -303 -448 -353 Percent Change in Number of Trips -82% -75% -80% -88% -78% -81%

Table 1: Trip Generation Comparison


Based on the trip generation comparison above, the revised development program is anticipated to generate approximately 447 fewer trips during the AM peak hour and 448 fewer trips during the PM peak hour compared to the old, approved site plan.

Summary of Findings

As noted in Table 1 above, the new site plan is expected to generate far fewer trips than estimated for the previously approved site plan dated November 24, 2020. The recommendations identified in the 2020 traffic impact study were sized under higher trip generation numbers while the current development is expected to have far fewer trips. The current site plan comprises land uses that have much lower trip generation potential and hence the improvements identified as part of the 2020 TIS study should still be considered acceptable.

Attachment A Old Trip Gen & Site Plan





SR 67 & CAMBY ROAD INDIANAPOLIS, IN






Trip Gen -Old Site Plan

Trip Generation based on ITE Trip Generation Manual (12th Edition)

Building	ITE Land	Land Use Description	SIZE	Independent		Base Vehicle Trips					
#	Use Code			Variable	AM Peak			PM Peak			
#				variable	Enter	Exit	Total	Enter	Exit	Total	
1	110	General Light Industrial	229	KSF	123	20	143	35	111	146	
2	110	General Light Industrial	157	KSF	65	11	76	18	58	76	
		High-Cube Transload and									
3	154	Short-Term Storage	244	KSF	15	4	19	7	18	25	
		Warehouse									
		High-Cube Transload and									
4	154	Short-Term Storage	282	KSF	17	5	22	8	20	28	
		Warehouse									
5	110	General Light Industrial	190	KSF	79	13	92	22	71	93	
6A	110	General Light Industrial	70	KSF	29	5	34	8	26	34	
6B	110	General Light Industrial	70	KSF	29	5	34	8	26	34	
	822	Strip Retail Plaza (<40k)	40	KSF	76	62	138	90	90	180	
		Pass-by Trip Reduction			0	0	0	-31	-31	-62	
			Total		433	125	558	165	389	554	

Attachment B New Site Plan

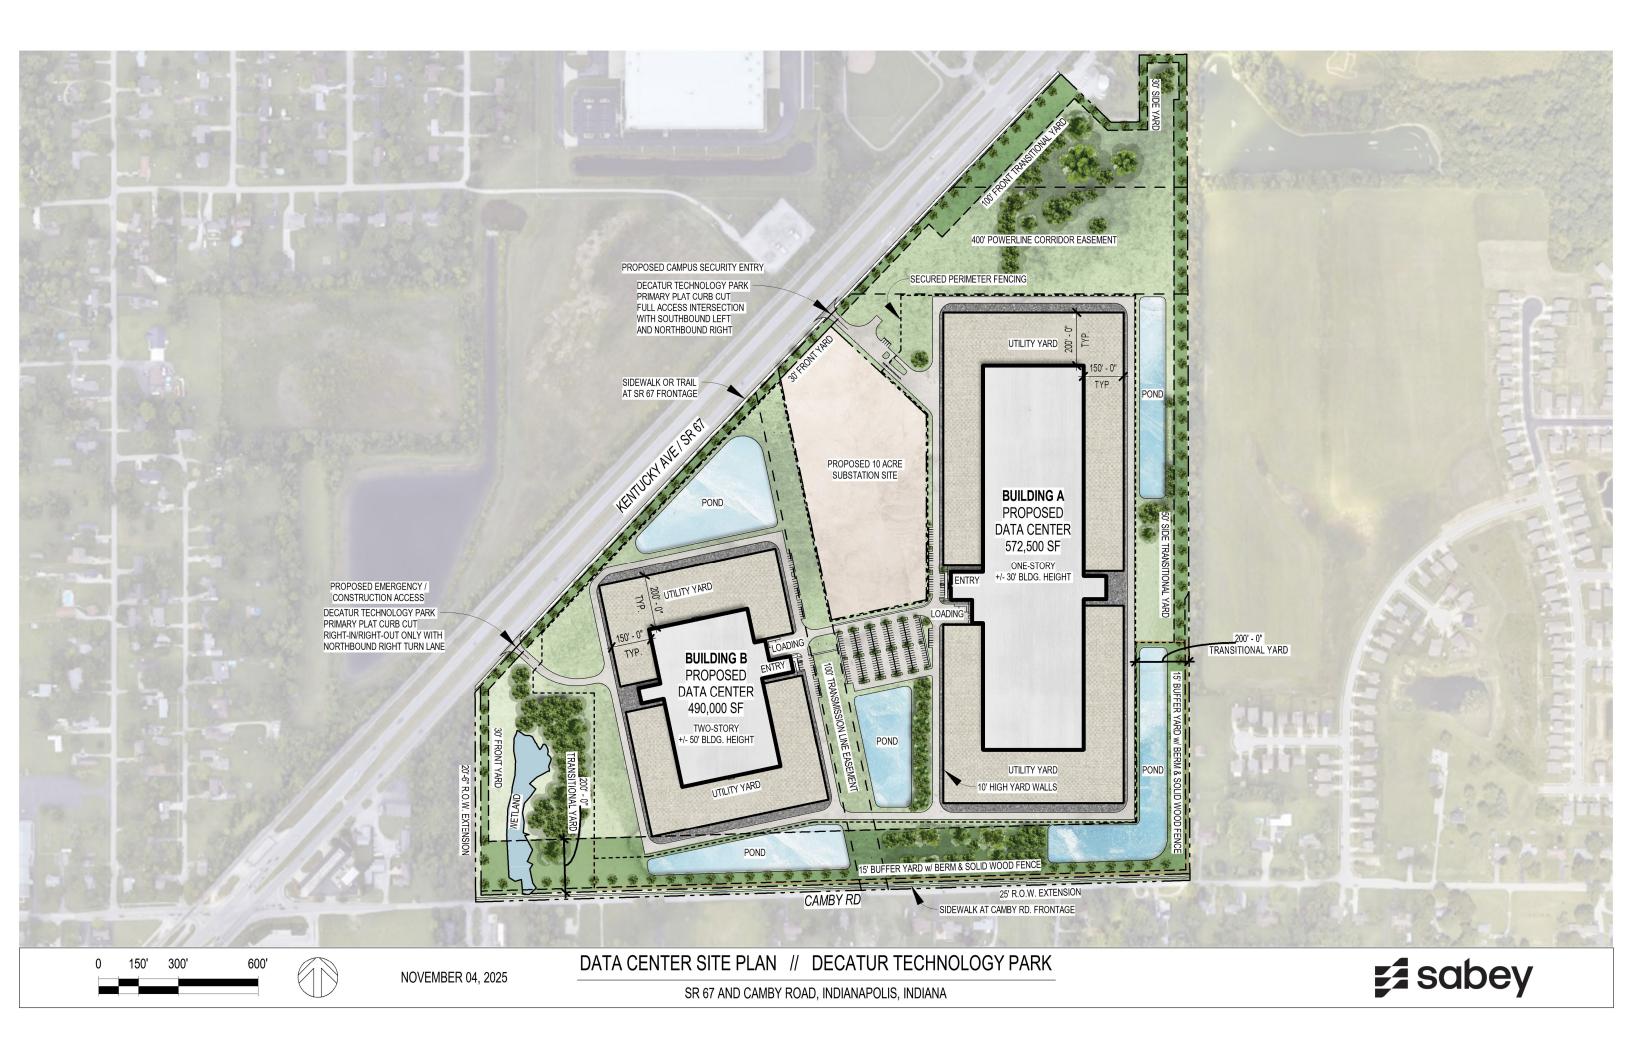

Attachment C New Trip Generation Calculations

Trip Gen - New Site Plan

Trip Generation based on ITE Trip Generation Manual (12th Edition)

ITE Land Use	Land Use		Independent			Base Veh	icle Trips		
Code	Description	Size	Variable	AM Peak			PM Peak		
Code				Enter	Exit	Total	Enter	Exit	Total
160	Data Center	572.5	KSF	27	11	38	5	24	29
160	Data Center	490	KSF	24	10	34	5	20	25
		51	21	72	10	44	54		

Trip Gen - Per Developer Inputs

Trip Generation based on Developer Inputs

		Base Vehicle Trips					
Description	Size	AM	Peak	PM Peak			
		Enter	Exit	Enter	Exit		
Data Center Operation Metrics							
Number of Full-Time Emloyees	100						
Directional Distribution (from ITE TripGen Manual)	100%	71%	29%	19%	81%		
Total Employee Trips per Day	100	71	29	19	81		
Deliveries per Week	300						
Delivery Trips per Day (7 days assumed)	43						
Peak Hour Delivery Trips	6	3	1	0	2		
Customers per Week	500						
Customer Trips per Day (7 days assumed)	71						
Peak Hour Customer Trips	10	6	1	1	3		
Total Full-Build Trips		80	31	20	86		
		111		10	06		

Hourly Distribution of Entering and Exiting Vehicle Trips by Land Use										
	Source: ITE Trip Generation Manual, 12th Edition									
Land I	Use Code	160								
	Land Use	Data Center								
	Setting	General Urban/Suburban								
Tin	ne Period	Weekday								
# [Data Sites	14								

_							% of 24-Hour Vehicle Trips			
	Exiting	Entering	Total Customer Trips	Exiting	Entering	Total Deliveries	Exiting	Entering	Total	Time
	36	36	71	22	22	43				
7	0	0	0	0	0	0	0.4%	0.3%	0.4%	12:00 - 1:00 AM
7	0	0	0	0	0	0	0.4%	0.3%	0.3%	1:00 - 2:00 AM
7	0	0	0	0	0	0	0.4%	0.4%	0.4%	2:00 - 3:00 AM
	0	0	0	0	0	0	0.5%	0.3%	0.4%	3:00 - 4:00 AM
	0	0	0	0	0	0	0.2%	0.7%	0.4%	4:00 - 5:00 AM
	0	3	3	0	2	2	0.7%	9.0%	4.8%	5:00 - 6:00 AM
< AM Peak Hou	1	6	7	1	3	4	4.2%	15.7%	9.9%	6:00 - 7:00 AM
7	1	5	6	1	3	4	4.0%	12.5%	8.2%	7:00 - 8:00 AM
	1	3	4	1	2	2	3.4%	8.1%	5.7%	8:00 - 9:00 AM
	1	2	4	1	1	2	4.1%	6.4%	5.2%	9:00 - 10:00 AM
	2	2	4	1	2	3	5.1%	6.9%	6.0%	10:00 - 11:00 AM
	2	2	5	1	1	3	7.0%	6.0%	6.5%	11:00 - 12:00 PM
	3	3	6	2	2	3	8.2%	7.9%	8.1%	12:00 - 1:00 PM
	3	3	5	2	2	3	8.1%	7.1%	7.6%	1:00 - 2:00 PM
	4	2	5	2	1	3	10.0%	4.9%	7.5%	2:00 - 3:00 PM
	4	1	5	2	1	3	10.1%	3.2%	6.7%	3:00 - 4:00 PM
	3	1	4	2	0	2	8.5%	1.4%	5.0%	4:00 - 5:00 PM
< PM Peak Hou	3	1	4	2	0	2	8.9%	1.9%	5.5%	5:00 - 6:00 PM
	2	0	3	1	0	2	6.4%	1.3%	3.9%	6:00 - 7:00 PM
	1	0	1	1	0	1	2.6%	0.9%	1.8%	7:00 - 8:00 PM
	0	0	1	0	0	1	1.4%	1.4%	1.4%	8:00 - 9:00 PM
	1	1	1	0	0	1	1.8%	1.7%	1.8%	9:00 - 10:00 PM
	1	0	1	1	0	1	2.5%	1.1%	1.9%	10:00 - 11:00 PM
	0	0	0	0	0	0	1.0%	0.4%	0.7%	11:00 - 12:00 AM
	35	36	71	21	22	43	100.0%	100.0%	100.0%	

Trip Gen Comparison

Trip Gen Comparison Table

Description		AM Peak		PM Peak		
Description	Enter	Exit	Total	Enter	Exit	Total
Total Trips per Old Approved Site Plan		125	558	165	200	554
(dated November 24, 2020) - OLD	433	125	556	165	389	334
Total Trips per Current Site Plan	80	31	111	20	86	106
(dated November 4, 2025) - NEW						100
Change in Number of Trips (NEW - OLD)	-353	-94	-447	-145	-303	-448
Percent Change in Number of Trips	-82%	-75%	-80%	-88%	-78%	-81%